Published Date: 13.05.2021



915 Anti-Static Bar



Product Code: 915

Fast and powerful static control for high speed applications.

The Meech Model 915 AC Anti-Static Bar has been designed to meet the most arduous of static elimination problems, including those encountered in high speed web applications.

The powerful performance of the Model 915 provides very fast decay times and effective ionisation up to distances of 150mm. The Model 915 bar is shockless and is easily maintained. It is powered by the Model 904.



www.updateltd.com | 1-800-229-0009

Product shown in this document may be covered by one or more patents, patents applied for and/or registered designs and/or trade marks. For further information please refer to our Head Office or visit www.meech.com.

© Meech Static Eliminators Ltd 2020

Published Date: 13.05.2021



Features & Benefits

Powerful, intense ion production	Very fast decay times and effective at fasterweb speeds
Extended range performance	Flexibility in positioning
Slim profile	Can be installed in restricted spaces
Resistively coupled emitter pins	Shockless, thereby enhancing operatorsafety
Sharp titanium emitter pins	Reduced pin contamination & longereffective life
Easy wipe casing	Easy maintenance, sustained performanceand reduced machine downtimes
"T" channel mounting system	Simple & quick installation
CUL and CE approved	Full conformance to international standards (UL, CSA & CE)

Product shown in this document may be covered by one or more patents, patents applied for and/or registered designs and/or trade marks. For further information please refer to our Head Office or visit www.meech.com.

Published Date: 13.05.2021



Technical Characteristics


Dimensions	18mm x 42mm x length (up to 4000mm)
Weight	Approx 1,100gms per 1000mm length
Operating voltage	4.5-7.0kV
Cable	2 metres shielded in flexible conduit; longerlengths can ordered
Construction	Anodised aluminium and fire retardant PVCextrusion
Emitters	Titanium
Mounting	Two M4 x 20mm studs into "T" slots
Operating current	Less than 5 mA
Maximum operating temperature	60°C
Typical Operating Range	30 - 150mm
Certifications	CE, UL.

Product shown in this document may be covered by one or more patents, patents applied for and/or registered designs and/or trade marks. For further information please refer to our Head Office or visit www.meech.com.

Belgium: +32 8067 0204 India: +91 (0)7030938211

Published Date: 13.05.2021



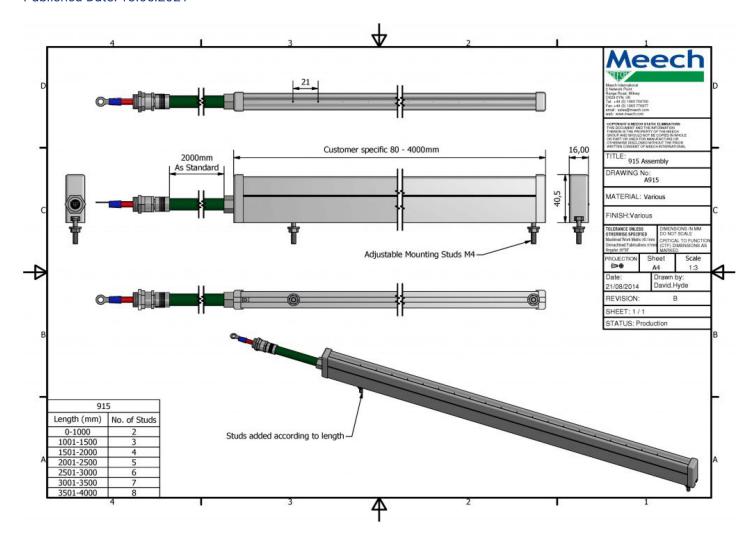



www.updateltd.com | 1-800-229-0009

Product shown in this document may be covered by one or more patents, patents applied for and/or registered designs and/or trade marks. For further information please refer to our Head Office or visit www.meech.com.