


**BETRIEBSANLEITUNG
OPERATING INSTRUCTIONS
INSTRUCTIONS DE SERVICE
ISTRUZIONI D'USO
HANDLEIDING
INSTRUCCIONES PARA EL MANEJO
MANUAL DE INSTRUÇÕES
NAUDOJIMOSI INSTRUKCIJA
KASUTUSJUHEND
LIETOŠANAS INSTRUKCIJA
DRIFTSINSTRUKS
DRIFTSINSTRUKTIONER
DRIFTSVEJLEDNING
INSTRUKCJA OBSŁUGI**

**KEZELÉSI ÚTMUTATÓ
NÁVOD K OBSLUZE
NAVODILO ZA UPORABO
NÁVOD NA OBSLUHU
UPUTE ZA RAD
MANUAL DE OPERATII
TREORACHA OIBRIÚCHÁIN
ΟΔΗΓΙΕΣ ΧΡΗΣΗΣ
EL KITABI
ИНСТРУКЦИИ ЗА ЕКСПЛУАТАЦИЯ
ИНСТРУКЦИЯ ПО ЕКСПЛУАТАЦИИ
取扱説明書
사용설명서
使用说明书**

VTLF 2.400 VTLF 2.500

MAKE IT BECKER.

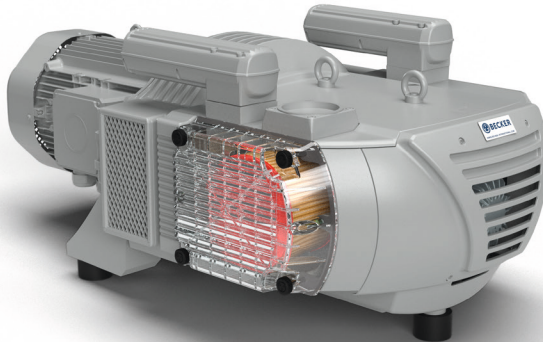

1

<p>MAX. VACUUM</p>		<p>mbar</p>
		<p>m³/h</p>
<p>L_{pA})))</p> <p>DIN EN ISO 11203 Accuracy Class 2 K_{sA} = 3 dB(A) l ← 1m</p>		<p>L_{pA} = 77-79 dB(A) - 50Hz L_{pA} = 79-80 dB(A) - 60Hz</p>

2

			<p>350-370 kg 772-816 lbs</p>
			<p>MIN 2x ☉</p>

3

<p>A > 400mm A > 16"</p>	<p>> 5°C/41°F < 45°C/113°F</p>	<p>max. 90%</p>	<p>max. 800m ↑</p>

4

<p>No. 2</p>	
<p>5 mm 6 mm</p>	
<p>13 mm</p>	

5

6

BECKER MADE IN GERMANY EN ISO 9000 CE

50 Hz 3000W 1 60 Hz 3000W

3000000 / 3000000 V_A / h 3000000 / 3000000 V_A / h

22.000 RPM / A 22.000 RPM / A

3000.0000 mm 3000.0000 mm 300 kg

7

GENERAL

¹⁾ motor protection switch

ADDITIONAL $M \geq 5.5 \text{ kW}$

RECOMMENDATION

A
Softstart

B

OPTIONAL

ON (I) -

OFF (0) -

MAX 6x/h

$M_{3\sim}$

PTC

$M_{3\sim}$

Bi-metal

8

8

9

10

VACUUM




11

AIR







>100°C
>212°F

12


Maintenance


13


n=0min⁻¹



2-3 Min




14




CLEANING INTERVAL

40h


200h





EN149 - FFP3
42 CFR 84 - N100

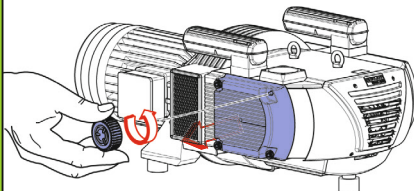

15

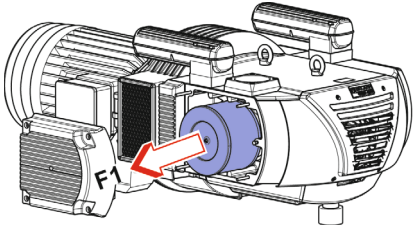

16

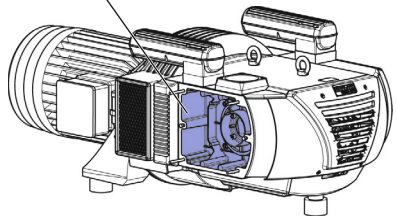17




F1: D: 217 mm
H: 146 mm
No.: 9095970000




EN149 - FFP3
42 CFR 84 - N100


18




3000 h

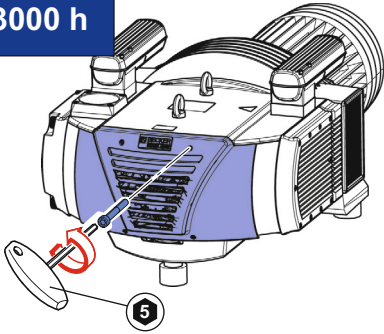



19

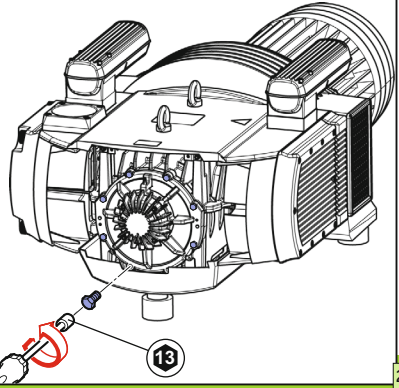

20

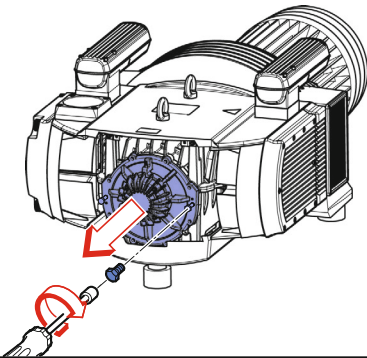

21



$A_{MAX} = 88\text{mm}$


$A_{MIN} = 60\text{mm}$

$A_{\text{fan}} < 60\text{mm}$




VTLF 2.400/2.500 → No. 90137301008 (SET)



22

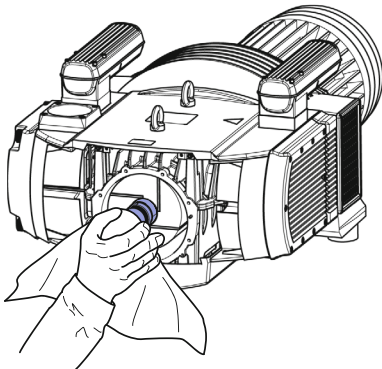

23

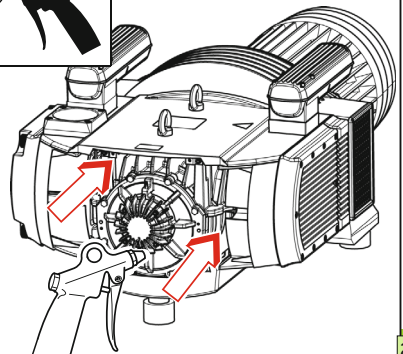

24

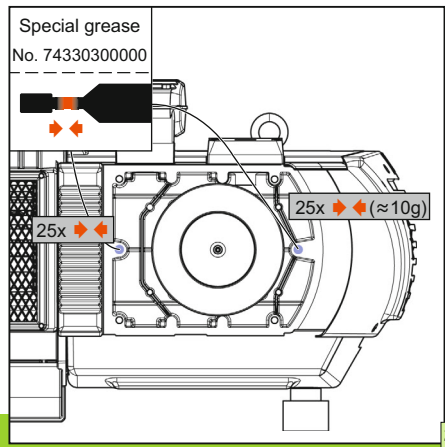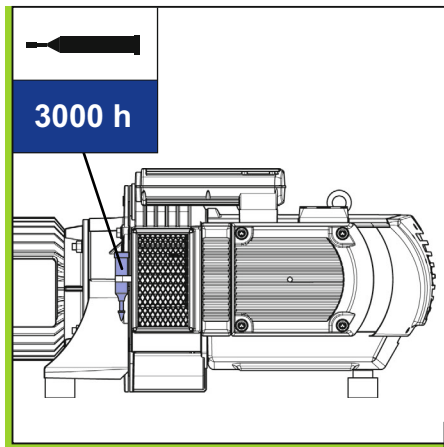



WWW.BECKER-INTERNATIONAL-SHOP.COM

Gebr. Becker GmbH
Hoelker Feld 29-31
42279 WUPPERTAL
GERMANY
info@becker-international.com
www.becker-international.com





MAKE IT BECKER.

28100052302 | 2021-12-09 | All rights reserved