

## 261v2 Flexi Nozzle



**Product Code:** A261V2-32-FLEX

The Meech Model 261v2 Flexi Nozzle is a small, lightweight ioniser with a 6mm push-fit inlet and an outlet extended by flexible knuckle trunking.

The 261v2 Flexi Nozzle is designed for use with Meech Pulsed DC Controllers, and is suitable for installation into machinery and equipment in both industrial and electronics environments.

It is particularly suited to high speed applications such as sheet delivery systems. The addition of flexible knuckle trunking enables the system to deliver ionised air with accuracy into "difficult to reach" places, where conventional systems would be ineffective or impossible to install.

It is powered by a Meech Model 233v3, 977CM or 977v3 Pulsed DC Controller.

**update** LTD YOUR UNLIMITED PARTS SOURCE  
FOR PRINT FINISHING AND PACKAGING  
[www.updateltd.com](http://www.updateltd.com) | 1-800-229-0009

# Product Data Sheet

Published Date: 20.08.2020



## Features & Benefits

<b>Flexible knuckle trunking extension</b>	Delivers ionisation precisely where it is needed. Effective in "difficult to reach" places
<b>Adjustable balance and frequency (Pulsed DC Controller)</b>	Optimisation of performance and extended ionisation range
<b>Rapid decay times</b>	Very effective in high speed applications
<b>Removable emitter pins</b>	Easy to clean and replace. Minimum maintenance downtime and extended equipment life
<b>Low air consumption</b>	Economical use of compressed air
<b>"Stay put" knuckle trunking</b>	Enables simple and quick installation
<b>Small and compact</b>	Easy to locate and install in confined spaces

Product shown in this document may be covered by one or more patents, patents applied for and/or registered designs and/or trade marks. For further information please refer to our Head Office or visit [www.meech.com](http://www.meech.com).

Meech International

UK: +44 1993 706 700  
Hungary: +36 27 535 075

US: +1 330 564 2000  
China: +86 400 820 0102

Belgium: +32 8067 0204  
India: +91 (0)7030938211

Singapore: +65 65918859

email: [sales@meech.com](mailto:sales@meech.com)  
web: [www.meech.com](http://www.meech.com)

© Meech Static Eliminators Ltd 2020

# Product Data Sheet

Published Date: 20.08.2020



## Technical Characteristics

Air Fitting	6mm diameter push fit
Max Air Pressure Rating	100 Psi (7 bar)
Typical Pressure	20 to 40Psi (1.5 to 3 bar)
Noise Level (261v2-32)	68 dBa (20 Psi at 1m) (1.5 bar)
Emitter Pins	Machined Titanium (7mm)
Decay Time	0.8 sec at 150mm at 30 Psi (2 bar) (1000V to 100V)
Ozone	Less than 0.01 ppm
Input Voltage	+/- 9kV DC Nominal
Ion Balance	+/- 10V or better at set up

Product shown in this document may be covered by one or more patents, patents applied for and/or registered designs and/or trade marks. For further information please refer to our Head Office or visit [www.meech.com](http://www.meech.com).

Meech International

UK: +44 1993 706 700  
Hungary: +36 27 535 075

US: +1 330 564 2000  
China: +86 400 820 0102

Belgium: +32 8067 0204  
India: +91 (0)7030938211


Singapore: +65 65918859

email: [sales@meech.com](mailto:sales@meech.com)  
web: [www.meech.com](http://www.meech.com)

© Meech Static Eliminators Ltd 2020

# Product Data Sheet

Published Date: 20.08.2020

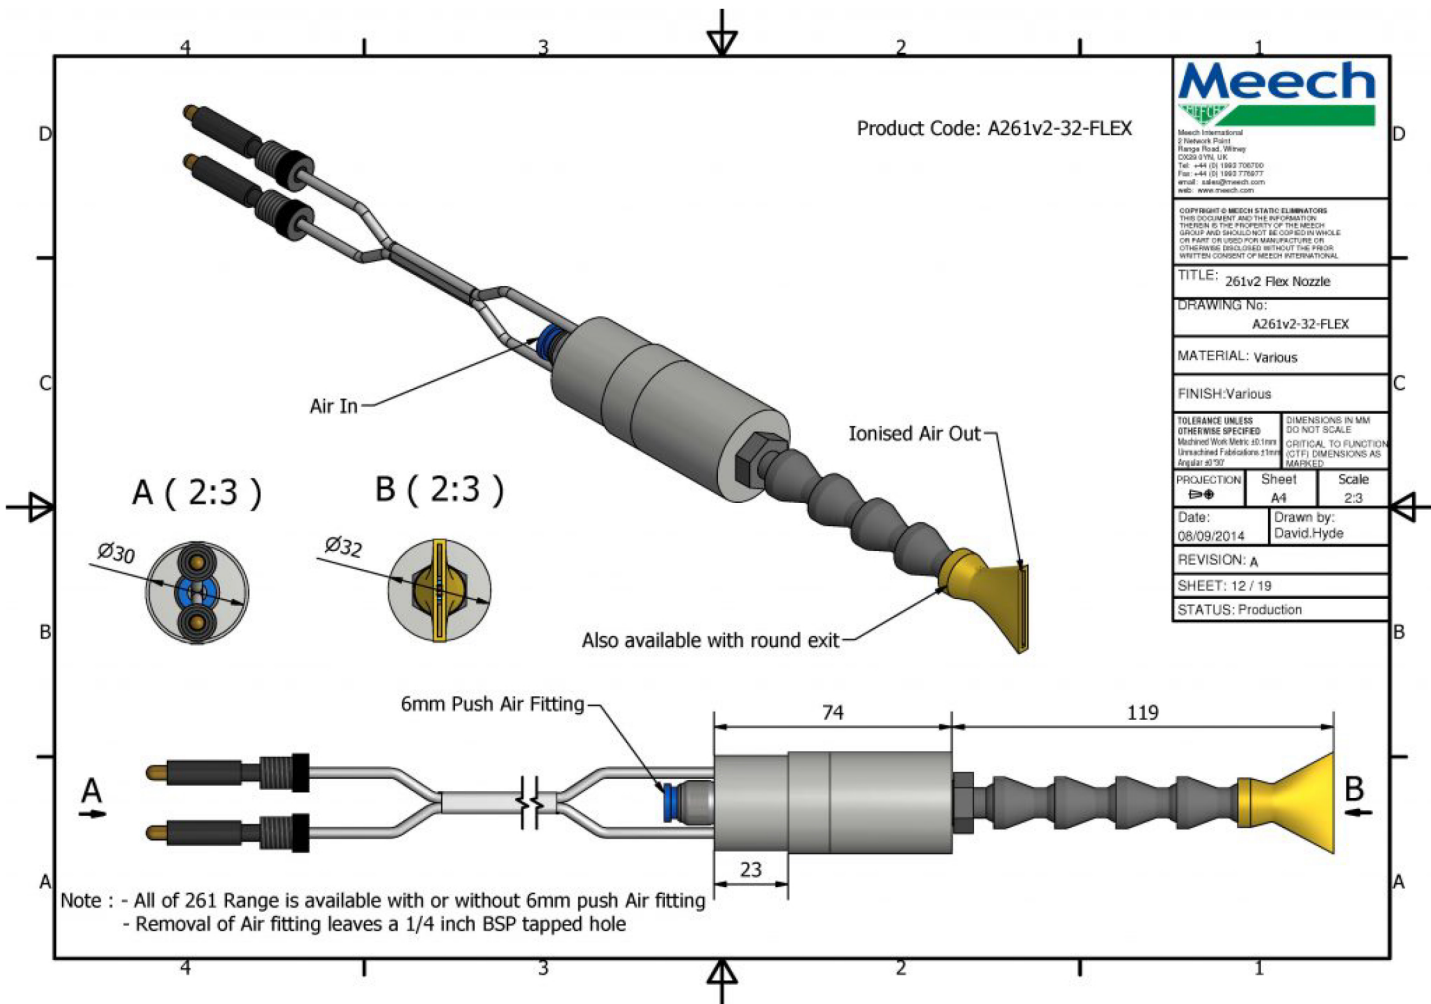

**update** LTD YOUR UNLIMITED PARTS SOURCE  
FOR PRINT FINISHING AND PACKAGING

www.update ltd.com | 1-800-229-0009

Product shown in this document may be covered by one or more patents, patents applied for and/or registered designs and/or trade marks. For further information please refer to our Head Office or visit [www.meech.com](http://www.meech.com).

Meech International

UK: +44 1993 706 700  
Hungary: +36 27 535 075

US: +1 330 564 2000  
China: +86 400 820 0102

Belgium: +32 8067 0204  
India: +91 (0)7030938211

Singapore: +65 65918859

email: [sales@meech.com](mailto:sales@meech.com)  
web: [www.meech.com](http://www.meech.com)

© Meech Static Eliminators Ltd 2020