

YOUR UNLIMITED PARTS SOURCE
FOR PRINT FINISHING AND PACKAGING

www.updateitd.com | 1-800-229-0009

Anti-Static Copper Tinsel

The Lowest Cost Static Eliminator Available

*100% copper for positive
grounding and strength**No power needed**Most effective low cost, low
maintenance passive static
electricity eliminator available*

APPLICATIONS


- Moving webs and conveyors
- Printing, Textile, Converting, Plastics
- Special Applications—Office machines, Fitness Equipment, Ticket Dispensers

BENEFITS

- Increase production speeds
- Increase profits
- Reduce rejects
- Reduce downtime
- Enhance product quality
- Enhance operator safety

Proven through decades of success to be the most effective low cost, low maintenance passive static electricity eliminator available. TAKK Anti-Static Tinsel is constructed of high quality 100% copper. The core is made of copper wire to ensure positive grounding and strength and the fine, sharply pointed copper strands provide greater static elimination.

- Highly conductive copper strands are interspersed to maximize effectiveness—but not so dense as to easily collect dust and particles
- Resists breakage, matting and shedding
- Self-energizing, induction type (no power needed) static eliminator; Does not spark or cause sparks—can be used in hazardous conditions
- Effectiveness increases as static increases
- O.E.M. availability—standard, custom or unique requirements; consult factory

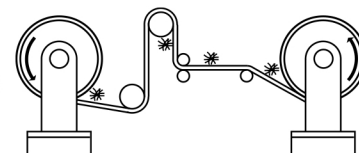*Most effective when placed close but not in
contact with the surface to be neutralized***#5020:** 1.25 inch diameter Copper Tinsel in two 36 foot coils (total 72 foot)**#5027:** 1.25 inch diameter Copper Tinsel in 504 foot reel
(Allows tinsel to be conveniently stored close to production machinery; ideal for applications that require long lengths)**#5023:** Attachment Kit – 20 pcs extension springs and 40 pcs attachment terminals**#5024:** Deluxe Attachment Kit – same as #5023 with addition of hand crimping tool**#5025:** Ring Terminal Pack – 100 pcs; #6 stud size*Custom pre-cut lengths and specially designed fastening and grounding accessories available for custom static solutions.*

#5027

Extension springs



Attachment terminals

VISIT WWW.STATICINSEL.COM FOR ADDITIONAL INFORMATION

Tinsel Specifications



#5020

1.25" dia. 100% Copper Tinsel in two 36 foot coils (total 72')

BOX SPECIFICATIONS: Each box contains 72 ft. of tinsel consisting of two 36 ft. coils

DIMENSIONS:

8.5" (L) x 8.5" (W) x 3" (D)
(215 mm x 215 mm x 76.2 mm)

WEIGHT: 9.25 oz. / (0.262 Kg.)


MASTER CARTON SPECIFICATIONS:

Each carton contains 12 individual boxes as described above; 864 ft. of tinsel

DIMENSIONS:

19.5" (L) x 9.125" (W) x 18.5" (H)
(496 mm x 232 mm x 470 mm)

WEIGHT: 7.5 lbs / (3.40 Kg.)



#5027

1.25" dia. 100% Copper Tinsel in 504 foot reel

Allows tinsel to be conveniently stored close to production machinery. Provides a continuous length for applications that require long lengths.

REEL SPECIFICATIONS: Each reel contains 504 ft. (165 meters) of tinsel.

DIMENSIONS:

Reel: 9.5" (W) x 9.75" (H)
Box: 10.25" (W) x 10.5" (H)

WEIGHT: 3 lbs / (1.3608 Kg.)

